



FG

120

Power
3 kW

Max weld surface

-

Max weldable electrode width

-

Free space behind electrode

-

Daylight (with 45 mm tall electrode)

-

Power requirement - max/hour
3.7 kW/h

Main fuse - type D
32 A

Working frequency
27.12 MHz





TP 120 and CP9

TP 120

The TP is an accessory available for the FG 120 and has a maximum electrode length of 300 mm. TP 120 is ideal for small detailed welds, such as reinforcement bands around a large structure.

CP9

The CP9 is a single-sided punching and welding of eyelets. It stands as an advanced HF welding machine designed to streamline your production process by integrating setting, punching, and welding into a single, seamless operation.

Extras

Computer and Software
Data transfer program
Travel programs
Control programs


Material positioning
Band holder
Magnet system
Vacuum system
Laser lines

Welding tools
Electrodes
Impulse welding unit
Tube-closing tools
Supplementary tool


Other
Cooling
Welding table

Dimensions

Front

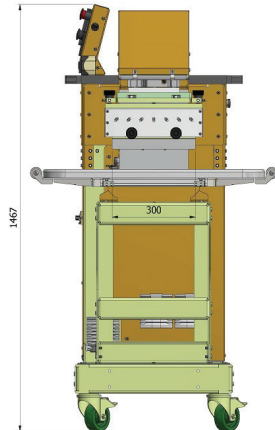

Side

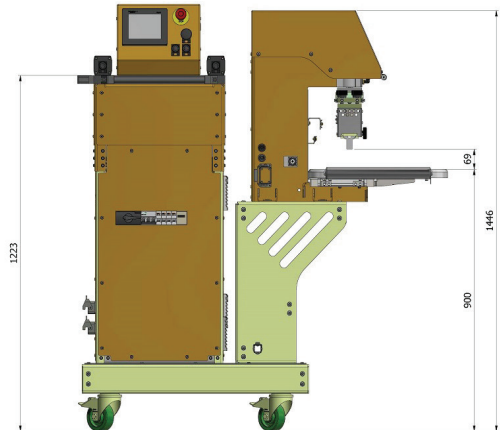

forsstrom.com/machine/generator-fg-120

Learn more about the benefits of having the Forsstrom FG as part of your production.

Call or email Forsstrom sales:
Tel: +46 523 66 66 00
sales@forsstrom.com

All machines are manufactured on order according to customer specification.
We make sure it is equipped to make your production as efficient as possible.